


ROHRflex PA 6-LL

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine or coarse profile, reduced fire protection, economical, HB (UL 94)

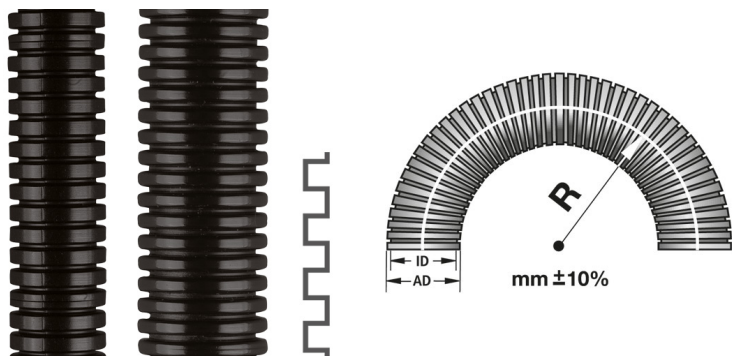

| | |
|---------------------|------------------|
| Temperature: | -25°C ... +120°C |
| Material: | PA 6 plastics |

CHARACTERISTICS:

- Properties: air- and liquid-tight
- oil resistant up to + 80° C
- benzine resistant
- widely resistant to acid and solvents
- free of silicone, cadmium, halogen
- flame retardant
- high UV-resistance [black]

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations



** VDE valid for OD 15,8 - 54,5 mm

| FLEXA No. | Colour | OD [mm] | Profile | ID [mm] | OD [mm] | BR stat. [mm] | BR dyn. [mm] | Weight [kg/m] | PU [m] |
|-------------|--------|---------|---------|---------|---------|---------------|--------------|---------------|--------|
| 10267202006 | Black | 10,0 | fine | 6,5 | 10,0 | 13 | 35 | 0,015 | 50 |
| 10267202010 | Black | 13,0 | fine | 10,0 | 13,0 | 20 | 80 | 0,025 | 50 |
| 10267202012 | Black | 15,8 | fine | 12,0 | 15,8 | 35 | 55 | 0,030 | 50 |
| 10267202014 | Black | 18,5 | fine | 14,3 | 18,5 | 40 | 65 | 0,035 | 50 |
| 10267202016 | Black | 21,2 | fine | 16,5 | 21,2 | 45 | 75 | 0,050 | 50 |
| 10267202023 | Black | 28,5 | fine | 23,0 | 28,5 | 55 | 100, | 0,070 | 50 |
| 10267202029 | Black | 34,5 | fine | 29,0 | 34,5 | 65 | 120, | 0,100 | 25 |
| 10267202036 | Black | 42,5 | fine | 36,0 | 42,5 | 90 | 150, | 0,110 | 25 |
| 10267202048 | Black | 54,5 | fine | 48,0 | 54,5 | 100 | 190, | 0,165 | 25 |
| | | | | | | | | | |
| 10267232016 | Black | 21,2 | coarse | 15,5 | 21,2 | 45 | 75 | 0,045 | 50 |
| 10267232023 | Black | 28,5 | coarse | 22,0 | 28,5 | 55 | 100 | 0,070 | 50 |
| 10267232029 | Black | 34,5 | coarse | 27,5 | 34,5 | 65 | 120 | 0,100 | 25 |
| 10267232036 | Black | 42,5 | coarse | 35,5 | 42,5 | 90 | 150 | 0,110 | 25 |
| 10267232048 | Black | 54,5 | coarse | 47,0 | 54,5 | 100 | 190 | 0,165 | 25 |
| | | | | | | | | | |
| 10267201006 | Grey | 10,0 | fine | 6,5 | 10,0 | 13 | 35 | 0,015 | 50 |
| 10267201010 | Grey | 13,0 | fine | 10,0 | 13,0 | 20 | 80 | 0,025 | 50 |
| 10267201012 | Grey | 15,8 | fine | 12,0 | 15,8 | 35 | 55 | 0,030 | 50 |
| 10267201014 | Grey | 18,5 | fine | 14,3 | 18,5 | 40 | 65 | 0,035 | 50 |
| 10267201016 | Grey | 21,2 | fine | 16,5 | 21,2 | 45 | 75 | 0,050 | 50 |

| FLEXA No. | Colour | OD [mm] | Profile | ID [mm] | OD [mm] | BR stat. [mm] | BR dyn. [mm] | Weight [kg/m] | PU [m] |
|--------------------|---------------|--------------------|----------------|--------------------|--------------------|--------------------------|-------------------------|--------------------------|-------------------|
| 10267231016 | Grey | 21,2 | coarse | 15,5 | 21,2 | 45 | 75 | 0,045 | 50 |
| 10267231023 | Grey | 28,5 | coarse | 22,0 | 28,5 | 55 | 100 | 0,070 | 50 |
| 10267231029 | Grey | 34,5 | coarse | 27,5 | 34,5 | 65 | 120 | 0,100 | 25 |
| 10267231036 | Grey | 42,5 | coarse | 35,5 | 42,5 | 90 | 150 | 0,110 | 25 |
| 10267231048 | Grey | 54,5 | coarse | 47,0 | 54,5 | 100 | 190 | 0,165 | 25 |

** VDE valid for OD 15,8 - 54,5 mm

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.