

LIQUID-TIGHT-EF

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, hooked profile, special fibre sealing, smooth, reinforced, flame-resistant PVC sheathing


Temperature: -25°C ... +90°C ^ +100°C

Material: cold strip galvanized | PVC

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: extremely liquid-tight
- widely resistant to oils and acids
- free of silicone and cadmium
- flexible
- complies with American installation specifications
- approved acc. to DIN EN IEC 61386-23

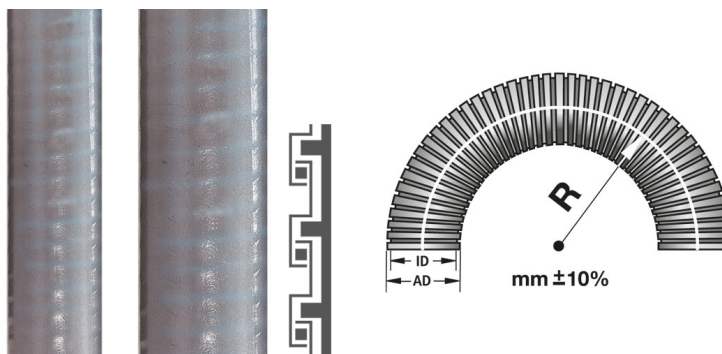

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations / for international applications



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12080111010	Grey	5/16 inch	10,0	14,5	105	265	0,140	50
12080111012	Grey	3/8 inch	12,5	18,0	145	360	0,260	50
12080111016	Grey	1/2 inch	16,0	21,0	170	425	0,320	50
12080111021	Grey	3/4 inch	21,0	26,5	190	475	0,440	50
12080111026	Grey	1 inch	26,5	33,0	195	490	0,700	25
12080111035	Grey	1 1/4 inch	35,5	42,0	250	625	1,000	25
12080111050	Grey	2 inch	51,5	60,0	320	780	1,200	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.