

## AIRflex-GRS

### Protective plastic conduits

Protective all-plastic conduit, plain inside and outside surfaces, helix of rigid plastic


**Temperature:** -25°C ... +90°C ^ +100°C

**Material:** PVC

**IP class [acc. to EN 60529]:** IP 68

#### CHARACTERISTICS:

- Properties: V2 according to UL 94
- flexible
- airtight and liquid tight
- widely resistant to oil and acids
- free of silicone and cadmium
- plain inside and outside, easy drawing-in of cables and cleaning outside surface of conduits

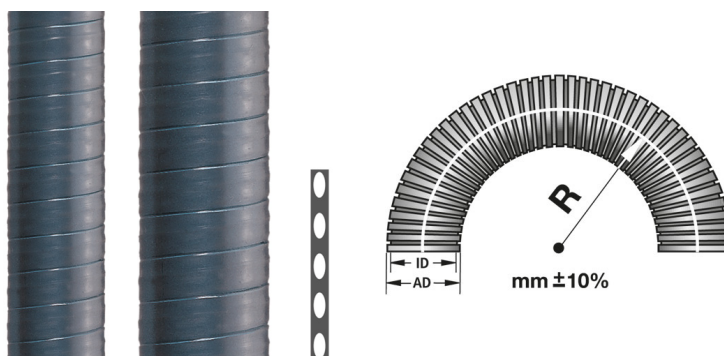

#### APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10220101010	Grey	14,0	10,0	14,0	50	125	0,085	50
10220101013	Grey	17,0	13,0	17,0	65	165	0,120	50
10220101016	Grey	21,0	16,0	21,0	75	190	0,160	50
10220101021	Grey	27,0	21,0	27,0	90	225	0,240	50
10220101029	Grey	36,0	29,0	36,0	130	325	0,400	25
10220101038	Grey	45,0	38,0	45,0	190	475	0,580	25
10220101048	Grey	56,0	48,0	56,0	250	625	0,740	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.