


ROHRflex PA 6-UL-SD

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine profile, approved acc. to UL 1660/CSA 227.2.1-14 Conduit E495847, V2 (UL 94)

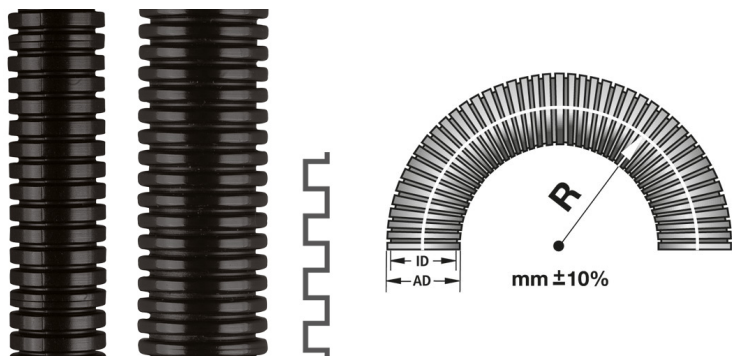

Temperature:	- 25°C ... +120°C
Material:	PA 6 plastics

CHARACTERISTICS:

- Properties: air- and liquid-tight
- oil resistant up to + 80°C
- benzine resistant
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- flame retardant
- high UV-resistance
- UL 1660 & CSA C22.2 Nr. 227.2.1-14; file no.: E495847
- REACH and RoHS compliant

APPLICATIONS:

- Application: machine and plant constructions / heating
- ventilation and air conditioning / outdoor applications



FLEXA No.	Nominal size [inch]	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10238202016	1/2 inch	Black	21,2	fine	16,0	21,2	50	75	0,075	50
10238202023	3/4 inch	Black	28,5	fine	22,5	28,5	60	100	0,120	50
10238202029	1 inch	Black	34,5	fine	28,4	34,5	70	120	0,155	25
10238202036	1 1/4 inch	Black	42,5	fine	35,5	42,5	100	150	0,222	25
10238202048	1 1/2 inch	Black	54,5	fine	47,5	54,5	110	190	0,300	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.