


BWK-P | PG thread | grey

Accessories

Screw connector fastening angle, PG thread, connection holder with two fastening bores

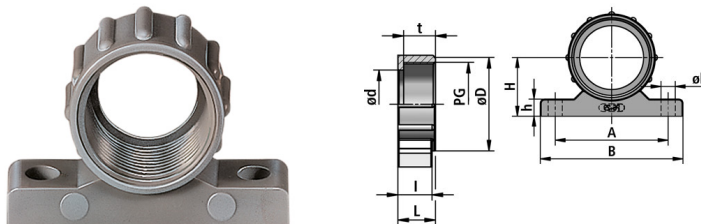

Temperature: -40°C ... +100°C

Material: PP plastics

CHARACTERISTICS:

- Properties: with two fastening bores



FLEXA No.	Thread type	A [mm]	B [mm]	Ø B [mm]	Ø D [mm]	Weight [kg/100]	PU [pcs.]
10315000009	PG9	29,0	40,0	5,7	19,0	0,400	50
10315000011	PG11	37,0	50,0	5,7	27,0	0,800	50
10315000013	PG13, 5	37,0	50,0	5,7	27,0	0,680	50
10315000016	PG16	37,0	50,0	5,7	27,0	0,604	50
10315000021	PG21	43,0	57,0	5,7	32,0	0,720	50
10315000029	PG29	53,0	67,0	6,7	41,0	1,160	25
10315000036	PG36	65,0	80,0	6,7	52,0	1,560	25
10315000048	PG48	76,0	93,0	6,7	65,0	2,360	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.