

LIQUID-TIGHT-EF-OR

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, hooked profile,, special fibre sealing, smooth, oil-resistant PVC sheathing


Temperature: -25°C ... +90°C ^ +100°C

Material: cold strip galvanized | PVC

IP class [acc. to EN 60529]: IP 68

CHARACTERISTICS:

- Properties: extremely liquid-tight
- widely resistant to acid and petrol
- highly oil-resistant
- free of silicone and cadmium
- flexible
- self-extinguishing

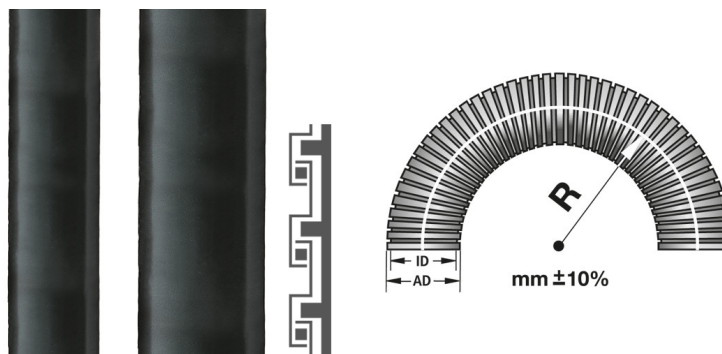

APPLICATIONS:

- Application: machine and plant constructions / automotive / shipbuilding / automation / electrical installations / for international applications



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12082102010	Black	5/16 inch	10,0	14,5	50	125	0,140	50
12082102012	Black	3/8 inch	12,5	18,0	60	150	0,250	50
12082102016	Black	1/2 inch	16,0	21,0	70	175	0,310	50
12082102021	Black	3/4 inch	21,0	26,5	85	210	0,400	50
12082102026	Black	1 inch	26,5	33,0	110	275	0,680	25
12082102035	Black	1 1/4 inch	35,5	42,0	110	275	0,880	25
12082102050	Black	2 inch	51,5	60,0	210	525	1,480	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.