

LIQUID-TIGHT-FOOD

Protective metal conduits liquid tight

Protective metal conduit, strip-wound, hooked profile, special fibre sealing, liquid tight, smooth, food-safe PU sheathing


Temperature: -40°C ... +80°C ^ +110°C

Material: cold strip galvanized | PU

IP class [acc. to EN 60529]: IP 68 | IP 69K

CHARACTERISTICS:

- Properties: food-safe
- extremely liquid-tight
- widely resistant to acid and petrol
- highly oil-resistant
- free of halogen silicone, cadmium
- microbe resistant
- flexible
- UV resistant
- self-extinguishing

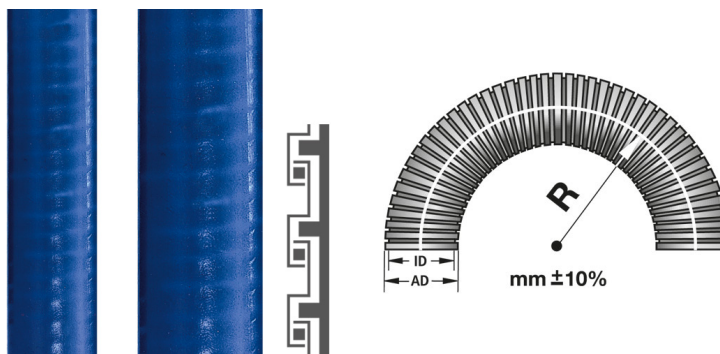

APPLICATIONS:

- Application: food and beverage industry / automotive / electrical installations / machine and plant constructions / for international applications



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
12083914016	Blue	1/2 inch	16,0	21,0	105	260	0,300	50
12083914021	Blue	3/4 inch	21,0	26,5	175	430	0,460	50
12083914026	Blue	1 inch	26,5	33,0	200	500	0,650	25
12083914035	Blue	1 1/4 inch	35,5	42,0	240	600	1,000	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.