

## K-EDU

## Protective plastic conduits

Protective plastic conduit, plain inside surface,  
galvanized steel wire braiding


**Temperature:** -25°C ... +90°C ^ +100°C

**Material:** PVC | galvanized steel

**IP class [acc. to EN 60529]:** IP 68

## CHARACTERISTICS:

- Properties: flexible
- airtight and liquid tight
- widely resistant to oil and acids
- free of silicone and cadmium
- constancy for raised internal pressure
- shielding as well as protection against hot swarfs
- smooth inside surface

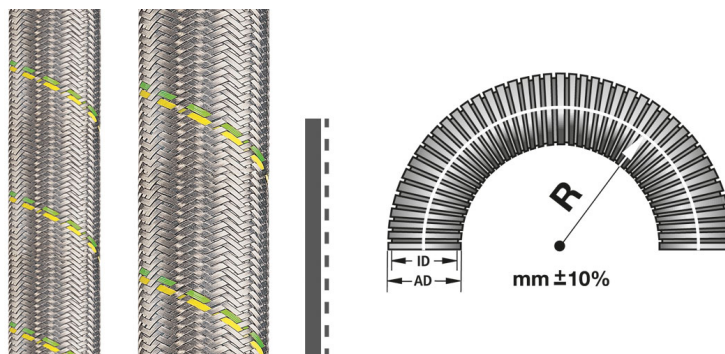

## APPLICATIONS:

- Application: machine and plant constructions / injection moulding machines / metal cutting machines / automotive / shipbuilding / automation / electrical installations



FLEXA No.	Colour	OD [mm]	ID [mm]	OD [mm]	Weight [kg/m]	PU [m]
14020101006		10,0	6,0	10,0	0,100	50
14020101009		14,0	9,0	14,0	0,150	50
14020101012		17,0	12,0	17,0	0,090	50
14020101014		19,0	14,0	19,0	0,230	50
14020101016		21,0	16,0	21,0	0,250	50
14020101021		27,0	21,0	27,0	0,400	50
14020101028		36,0	28,0	36,0	0,580	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.