


ROHRflex-Duo PP

ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, two-pieces, longitudinal dividable, recloseable, V2 (UL 94)

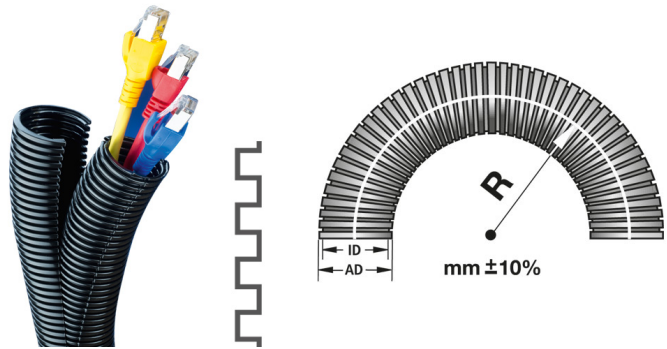

Temperature: -25°C ... +120°C ^ +150°C

Material: PP plastics

CHARACTERISTICS:

- Properties: good chemical resistance
- free of phosphor and cadmium
- self-extinguishing
- flame retardant
- flexible
- UV-resistant

APPLICATIONS:

- Application: for retrofit and repair / switch cabinet construction / insulated electrical installations for application rules / machine and plant constructions acc. to DIN EN 60204 / electrical installations



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10270032006	Black	10,0	fine	5,6	10,3	30	90	0,020	50
10270032008	Black	13,0	fine	8,5	13,3	40	120	0,030	50
10270032010	Black	15,8	fine	11,0	16,0	50	150	0,040	50
10270032014	Black	21,2	fine	15,1	21,3	65	200	0,060	50
10270032019	Black	25,4	fine	19,6	25,4	75	230	0,070	50
10270032020	Black	28,5	fine	21,6	28,1	80	240	0,090	50
10270032024	Black	31,5	fine	24,0	31,5	100	300	0,110	25
10270032026	Black	34,5	fine	26,8	34,4	110	330	0,130	25
10270032032	Black	42,5	fine	31,8	42,7	145	440	0,160	25
10270032043	Black	54,5	fine	43,9	53,9	150	450	0,230	25
10270032061	Black	79,0	fine	60,5	78,0	220	660	0,440	10
10270032106	Black	10,0	fine	5,6	10,3	30	90	0,020	10
10270032108	Black	13,0	fine	8,5	13,3	40	120	0,030	10
10270032110	Black	15,8	fine	11,0	16,0	50	150	0,040	10
10270032114	Black	21,2	fine	15,1	21,3	65	200	0,060	10
10270032120	Black	28,5	fine	21,6	28,1	80	240	0,090	10
10270032126	Black	34,5	fine	26,8	34,4	110	330	0,130	5
10270032132	Black	42,5	fine	31,8	42,7	145	440	0,160	5
10270032143	Black	54,5	fine	43,9	53,9	150	450	0,230	5
10270032161	Black	79,0	fine	60,5	78,0	220	660	0,440	5

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.