


Multi-FRM68

Connectors

Special sealing for ROHRflex-MULTI connectors

Temperature:	-40°C ... +120°C
Material:	TPE plastics
IP class [acc. to EN 60529]:	IP 68 IP 69K

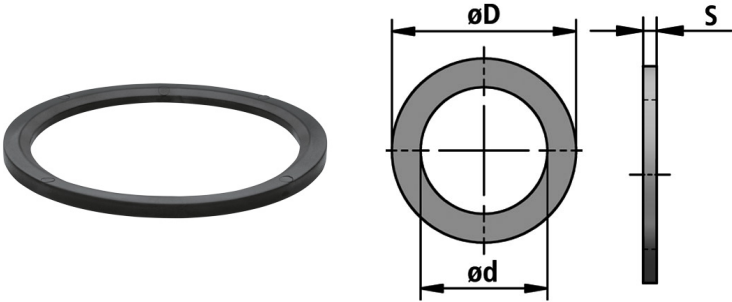

FLEXA No.	Description	NW [mm]	PU [pcs.]
15032211070	Material: TPE NW 70	66,0	1
15032211095	Material: TPE, NW 95	89,0	1

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.