EWK-M | metric thread

Accessories

Enlargement, extension of a metric thread into a larger size

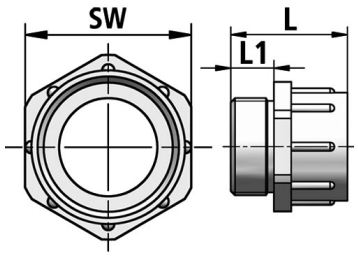

Temperature:	-30°C ... +100°C
Material:	polyamide, fibre-glass reinforced

CHARACTERISTICS:

- Properties: resistant against light acids and soft lyes
- resistant against sea water, benzine and mineral oil

FLEXA No.	Outer thread	Inner thread	Colour	L1 [mm]	L [mm]	WS [mm]	Weight [kg/100]	PU [pcs.]
10362M16M20	M16x1, 5	M20x1, 5	black	8,0	20,5	24	0,400	100
10362M20M25	M20x1, 5	M25x1, 5	black	8,0	21,0	30	1,100	100
10362M25M32	M25x1, 5	M32x1, 5	black	8,0	23,0	37	1,000	50
10362M32M40	M32x1, 5	M40x1, 5	black	10,0	25,0	45	1,320	50
10362M40M50	M40x1, 5	M50x1, 5	black	8,0	27,5	55	2,340	50
10361M16M20	M16x1, 5	M20x1, 5	grey	8,0	20,5	24	0,400	100
10361M20M25	M20x1, 5	M25x1, 5	grey	8,0	21,0	30	1,100	100
10361M25M32	M25x1, 5	M32x1, 5	grey	8,0	23,0	37	1,000	50
10361M32M40	M32x1, 5	M40x1, 5	grey	10,0	25,0	45	1,320	50
10361M40M50	M40x1, 5	M50x1, 5	grey	8,0	27,5	55	2,340	50

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA´s knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.