


PSL-VA

Protective conduits

Special protective conduit for the medical-, sensor technology and the beam wave guide technology, helix made of stainless steel, fiber glass braiding, silicone rubber sheathing

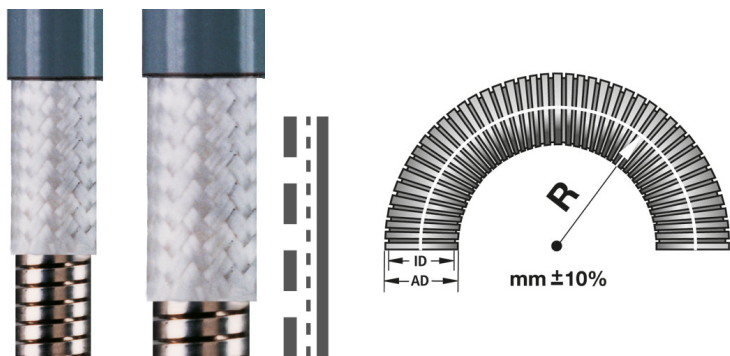

Temperatura: -50°C ... +180°C

Material: stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber

class IP [acc. to EN 60529]: IP 68

APLICACIONES:

- Application: opto-electronics / medical technology / beam wave guide technology / technical endoscopy / measuring instruments / sensor technology

CARACTERÍSTICAS:

- Properties: flexible
- stretch resistant
- air- and liquid-tight
- temperature resistant
- low flammability
- no appearance of toxic and corrosive fire gases
- widely resistant to solvents and chemicals
- free of halogen and cadmium



FLEXA No.	Colour	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10133901003	Grey	3,3	5,3	10	25	0,030	*
10133901013	Grey	3,8	5,8	12	30	0,035	*
10133901014	Grey	4,5	6,5	15	40	0,040	*
10133901005	Grey	5,0	7,0	20	50	0,045	*
10133901006	Grey	6,5	8,9	25	65	0,065	*
10133901018	Grey	7,2	9,6	25	65	0,075	*
10133901007	Grey	7,7	10,1	30	75	0,180	*

*en longitud de producción

Empfehlungen zu Anwendungsgebieten, Einsatzbereichen, Produkten oder Produktkombinationen erfolgen von FLEXA nach bestem Wissen und bisherigen Erkenntnissen und Erfahrungen. Der Einsatz von FLEXA Produkten für spezifische Anwendungen muss vom Benutzer unbedingt überprüft werden. Alle veröffentlichten Texte, Produktabbildungen, Zeichnungen und Tabellen dürfen ohne die Zustimmung von FLEXA nicht kopiert, bearbeitet oder verändert werden. Technische Zeichnungen, Zulassungen, Zertifikate und Ergebnisse des FLEXA - eigenen Prüflabors werden auf Anfrage gerne von uns zur Verfügung gestellt. Druckfehler, Fehler in technischen Zeichnungen, Irrtum und technische Änderungen behalten wir uns vor.