RQGZ-M | metric thread

Connectors

Plastic connector, quick-type, straight, metric outer thread, integrated snap-in sleeve with sealing, strain relief, high density

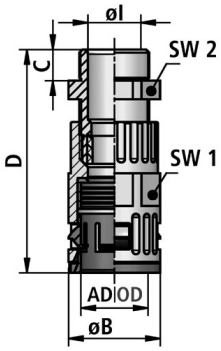

Température:	-40°C ... +120°C
Matériau:	PA plastics
Protection [acc. to EN 60529]:	IP 68	IP 69K

CHARACTERISTICS:

- Properties: resistant against oil and benzine
- widely resistant to acids and solvents
- free of silicone, cadmium, halogen
- optimal held and sealing of cables at the same time

APPLICATIONS:

- Application: machine and plant constructions / automotive / railway industry / shipbuilding / automation / electrical installations

FLEXA No.	DE [mm]	Couleur	Filetage	Klemmbereich [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	SW1 [mm]	SW2 [mm]	Poids [kg|100]	UE [Pcs]
15020031212	10,0	Black	M12 x 1,5	4,0-6,5	6,5	17,0	8,0	51,0	16	15	0,800	20
15020031216	13,0	Black	M16 x 1,5	5,0-9,5	9,5	20,0	8,0	53,0	18	20	1,300	20
15020031217	15,8	Black	M16 x 1,5	5,0-9,5	10,5	23,0	8,0	60,0	21	20	1,500	20
15020031218	15,8	Black	M20 x 1,5	4,0-7,0	12,0	23,0	8,0	59,0	21	24	1,500	20
15020031220	15,8	Black	M20 x 1,5	8,0-11,0	12,0	23,0	8,0	59,0	21	24	1,500	20
15020031223	18,5	Black	M20 x 1,5	8,0-11,0	12,0	27,0	8,0	59,0	24	24	1,700	20
15020031222	21,2	Black	M20 x 1,5	8,0-11,0	12,0	29,5	8,0	68,0	27	24	1,800	10
15020031225	21,2	Black	M25 x 1,5	11,0-16,0	16,0	33,5	8,0	70,0	27	29	3,000	10
15020031228	28,5	Black	M25 x 1,5	11,0-17,0	17,0	37,0	8,0	82,0	34	39	3,200	10
15020031232	28,5	Black	M32 x 1,5	15,0-21,0	18,0	37,0	10,0	82,0	34	36	3,800	10
15020031240	34,5	Black	M40 x 1,5	16,0-26,0	25,0	44,0	10,0	85,0	40	46	5,700	10
15020031250	42,5	Black	M50 x 1,5	27,0-35,0	32,0	58,0	12,0	141,0	55	55	11,200	10
15020031263	54,5	Black	M63 x 1,5	32,0-42,0	44,0	68,0	12,0	145,0	65	68	16,270	10
15020031012	10,0	Grey	M12 x 1,5	4,0-6,5	6,5	17,0	8,0	51,0	16	15	0,800	20
15020031016	13,0	Grey	M16 x 1,5	5,0-9,5	9,5	20,0	8,0	53,0	18	20	1,300	20
15020031017	15,8	Grey	M16 x 1,5	5,0-9,5	10,5	23,0	8,0	60,0	21	20	1,500	20
15020031020	15,8	Grey	M20 x 1,5	8,0-11,0	12,0	23,0	8,0	59,0	21	24	1,500	20
15020031023	18,5	Grey	M20 x 1,5	8,0-11,0	12,0	27,0	8,0	59,0	24	24	1,700	20
15020031022	21,2	Grey	M20 x 1,5	8,0-11,0	12,0	29,5	8,0	68,0	27	24	1,800	10
15020031025	21,2	Grey	M25 x 1,5	11,0-16,0	16,0	33,5	8,0	70,0	27	29	3,000	10
15020031028	28,5	Grey	M25 x 1,5	11,0-17,0	16,0	37,0	8,0	82,0	34	29	3,200	10

Connectors

FLEXA No.	DE [mm]	Couleur	Filetage	Klemmbereich [mm]	Ø I [mm]	Ø B [mm]	C [mm]	D [mm]	SW1 [mm]	SW2 [mm]	Poids [kg|100]	UE [Pcs]
15020031032	28,5	Grey	M32 x 1,5	15,0-21,0	18,0	37,0	10,0	82,0	34	36	3,800	10
15020031040	34,5	Grey	M40 x 1,5	16,0-26,0	25,0	44,0	10,0	85,0	40	46	5,700	10
15020031050	42,5	Grey	M50 x 1,5	27,0-35,0	32,0	58,0	12,0	141,0	55	55	11,200	10
15020031063	54,5	Grey	M63 x 1,5	32,0-42,0	44,0	68,0	12,0	145,0	65	68	16,270	10

Les recommandations concernant les domaines d'application, les domaines d'utilisation, les produits ou les combinaisons de produits sont faites par FLEXA au mieux de ses connaissances et de ses expériences antérieures. L'utilisation des produits FLEXA pour des applications spécifiques doit être vérifiée par l'utilisateur. Tous les textes publiés, les images de produits, les dessins de produits et les listes ne peuvent être copiés, modifiés ou changés sans le consentement de FLEXA. Les dessins techniques, les approbations, les certificats et les résultats du propre laboratoire d'essai de FLEXA sont disponibles sur demande. Pour les fautes d'impression, les erreurs dans les dessins techniques, les erreurs et les modifications techniques, nous n'assumons aucune responsabilit.